


## SPECIFICATIONS


Light Source	LED	
Spectrum	S, H, W	Standard (S), Hybrid (H), White (W)
PPF	610, 580, 590 $\mu\text{mol/s}$	(S), (H), (W)
Input Power	240 W	* Tolerance +/- 2%
Efficacy	2.54, 2.42, 2.46 $\mu\text{mol/J}$	(S), (H), (W)
Input Voltage	277/480 VAC	
Input Frequency	60 Hz	
Inrush current	480 VAC: 1,3 A <sup>2</sup> s, 1,43 ms	
Fixture Dimensions	296 mm W x 166 mm L x 81 mm H	
Weight	4.3 kg	
Input connector	Wieland RST20I3S S1 ZR1	
Mounting Height	Trellis mounted	
Enclosure material	Tempered AR-glass, Powder coated steel enclosure	
Heat sink material	Anodized aluminum	
Thermal Management	Passive	
Dimming	PWM, 0 – 10V*	*on request
Dimming connector	M8	
Automation interface	Netled lighting automation	*Greenhouse automation compatible (0-10 V)
Beam angle	80 °	
Lifetime (L90)	40 000 h	
Power Factor	96 %	(277 VAC)
Operating temperature	0 – 40 °C	
Storage temperature	-20 – 40 °C	
Ingress Protection Rating	IP55	
Certifications	CE, RoHs, cETLus	
C16 Installation quantity	11, 4	277 VAC, 480 VAC



Hybrid

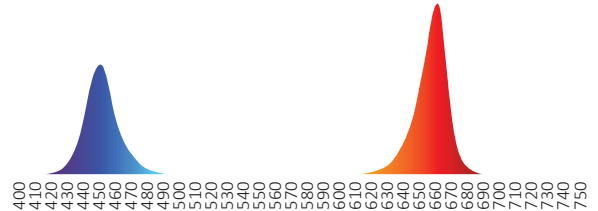

White

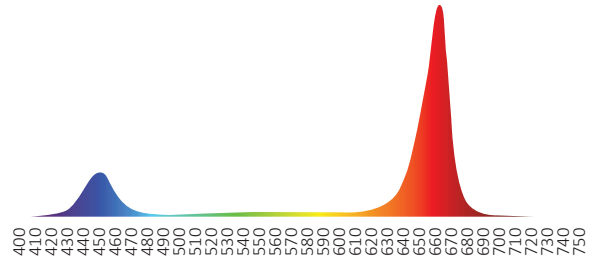

Standard

